

REVISIONS			
REV	CHANGE NO.	DATE	CFG APPROVAL
-	INIT RLSE	2008-06-09	J. PETRI

SRIUSB201 NONHERMETIC WIRED PLASTIC SHELL USB PLUG CONNECTOR

1. MATES WITH NONHERMETIC USB FEEDTHROUGH.



2. MATERIALS:

- a. SHELL: POLYETHERETHERKETONE (PEEK)
- b. HARDWARE: STAINLESS STEEL
- c. CABLE: 28AWG, KAPTON INSULATED WIRE
STAINLESS STEEL BRAIDED JACKET (GROUNDED)

3. ORDERING INSTRUCTIONS:

SPECIFY BASE NUMBERS FOLLOWED BY DASH NUMBER INDICATING CABLE LENGTH.

EXAMPLE: SRIUSB201 - 1 - 39

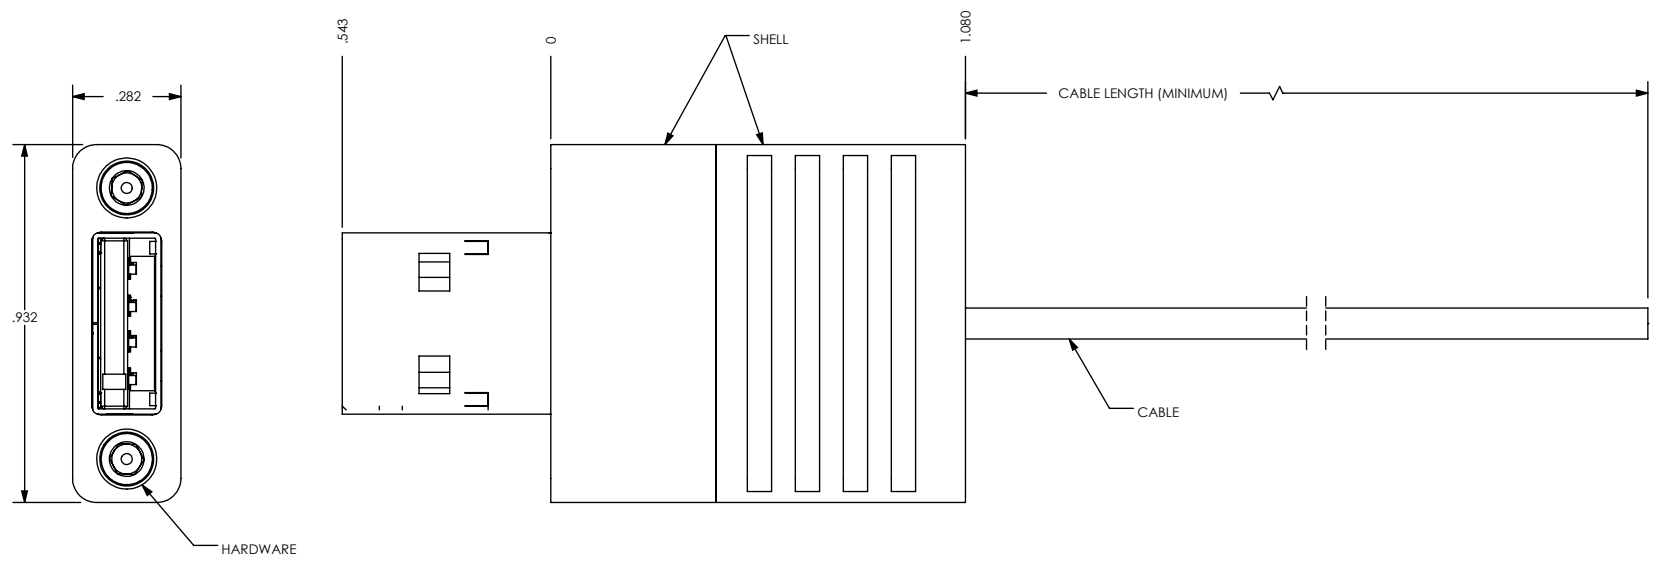

UNLESS OTHERWISE SPECIFIED
 DIMENSIONING IAW ASME Y14.5M-1994
 DIMENSIONS APPLY AFTER PROCESSES
 DIMENSIONS IAW US CUSTOMARY UNITS
 .X ± .1, .XX ± .01, .XXX ± .005, ∠ ± .5°
 .010 MAX OUTSIDE R, .005 MAX INSIDE R
 125 RMS SURFACE FINISH

THIRD ANGLE PROJECTION

		(321) 254-4067 WWW.SRIHERMETICS.COM	
TITLE			
CONNECTOR, USB, TYPE A, HI-VAC PLUG			
SIZE	DOCUMENT	SRIUSB201	REV
A			-
SCALE	CAGE CODE	3PJY7	SHEET
2:1			1 OF 1